

PH GB 010022W0	M.A.L. DOSSIER
-------------------	-------------------

(19)  **Europäisches Patentamt**
European Patent Office
Office européen des brevets



(11) **EP 0 897 225 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.02.1999 Bulletin 1999/07

(51) Int. Cl.⁶: **H04B 7/005**

(21) Application number: 98109911.2

(22) Date of filing: 29.05.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 12.08.1997 JP 228976/97

(71) Applicant: **NEC CORPORATION**
Tokyo (JP)

(72) Inventors:
• **Yoshida, Shousei**
Minato-ku, Tokyo (JP)
• **Ushirokawa, Akihisa**
Minato-ku, Tokyo (JP)
• **Furukawa, Hiroshi**
Minato-ku, Tokyo (JP)

(74) Representative:
VOSSIUS & PARTNER
Siebertstrasse 4
81675 München (DE)

(54) **Mobile station and method for transmission power control and interference reduction in mobile communication systems**

(57) In a method of controlling transmission power in a mobile station which switches a plurality of base stations from one to another with a hand-off time interposed on switching, an increase of the transmission power is suppressed with reference to reception levels of pilot signals sent from the plurality of the base stations which are divided into a first group of base stations under connection and a second group of base stations under non-connection. Specifically, the transmission power is slowly or gradually increased or kept constant when the reception level of the pilot signal sent from the second group base station exceeds that of the pilot signal sent from the first group base station.

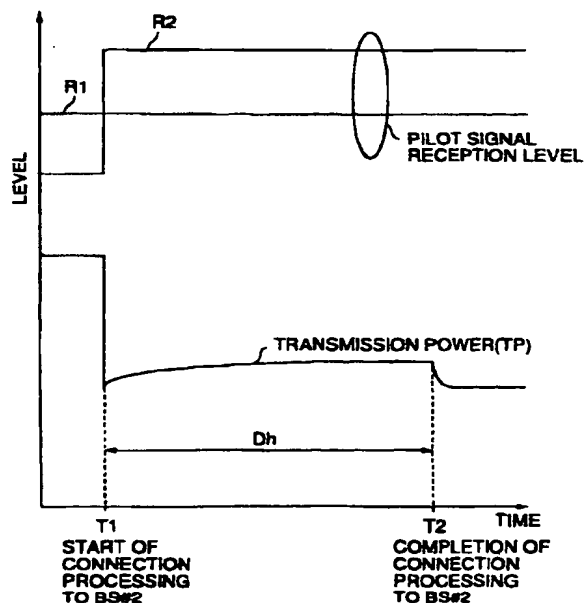


Fig.7

EP 0 897 225 A2

Description

[0001] This invention relates to a mobile station for use in a communication system and, in particular, to a method of controlling transmission power in the mobile station.

[0002] Heretofore, considerable attention has been devoted to a CDMA mobile radio communication system as a communication system of the type described. In such a CDMA mobile radio communication system, a plurality of base stations are spatially dispersed or arranged to define service areas, respectively, like in any other mobile radio communication systems. However, the CDMA mobile radio communication system is advantageous in that the same frequency can be used in each of the base stations to transmit a sequence of digital signals and a frequency resource can be therefore effectively utilized therein. In other words, radio channels are defined by a common frequency.

[0003] In this event, each digital signal is transmitted in the form of spread spectrum signals by using a code peculiar or pre-assigned to each of the base stations. In addition, a pilot signal is also usually pre-assigned to each base station to specify the respective base stations and is generated at a constant power level from each base station. Therefore, such a pilot signal may be called a constant power signal which is generated at a predetermined power level from each base station.

[0004] Herein, it should be considered that each of mobile stations is movable through various service areas of the base stations and must be therefore communicable with every base station. Thus, each mobile station is moved or traveled through the plurality of the service areas. In this event, each of the mobile stations continues to carry out communication during movement without any interruption of communication, switching the base stations from one to another. Such a switching operation will be referred as a hand-off or hand-over operation.

[0005] On the other hand, each of the service areas is not always geometrically completely separated from one another but has a boundary spatially and partially overlapped with one another. Taking this into consideration, each mobile station is put into a state which is communicable with a plurality of the base stations when the hand-off operation is carried out within an overlapped area. In other words, the hand-off operation is carried out by the use of transmission and reception between a single mobile station and a plurality of the base stations in the CDMA cellular mobile radio communication system. Such a hand-off operation is generally called a soft hand-off operation.

[0006] Herein, it is to be noted in the CDMA cellular mobile radio communication system that transmission electric power must be always minimized at each of the mobile stations while communication is usually carried out through a radio channel with the base station. Otherwise, interference inevitably takes place in the other radio channels because the same frequency is used in common to the other base stations. Consequently, the interference for the other radio channels can be reduced to a minimum. This enables concurrent communication of each base station with a lot of the mobile stations.

[0007] Taking the above into consideration, transmission power control should be executed in each mobile station to measure a transmission loss of each base station and to select the base station of a minimum transmission loss. As a result of the transmission power control, each mobile station is always connected to the base station of the minimum transmission loss.

[0008] More specifically, such transmission power control which is executed in each mobile station is classified into first and second types of transmission power control. In the first type of transmission power control, an open loop type of control operation is carried out by measuring a reception level of each pilot signals sent from the base stations and by determining the transmission power in each mobile station with reference to the results of measurements. In the second type of transmission power control, a closed loop type of control operation is made by measuring a quality of communication or a reception level of a desired signal in each base station under connection and by indicating transmission output power to the mobile station so that the quality of communication or the reception level is kept at a constant.

[0009] The first type of transmission power control can quickly control the transmission power in each mobile station on the basis of the reception level of the pilot signals measured at each mobile station and enables high speed control operation in response to an abrupt variation of the transmission loss. On the other hand, the second type of transmission power control responds to a variation of a desired signal due to fading and enables precise control operation so as to guarantee a constant quality of communication or a constant reception level of the desired signal. In other words, the second type of transmission power control is slow in control speed in comparison with the first type of transmission power control.

[0010] Under the circumstances, consideration is made about a mobile station which adopts such two types of transmission power control and which communicates with a certain base station under connection, which may be called an old base station. In addition, it is assumed that the mobile station is suddenly switched to a new base station under non-connection by the soft hand-off operation. In this event, it is preferable that the transmission power between the mobile station and the base station under connection is kept at a low level until connection is completed between the mobile station and the new base station during the soft hand-off operation in order to avoid the interference for the any other mobile stations.

[0011] However, it has been found out according to the inventors' experimental studies that the transmission power

between the mobile station and the base station under connection, namely, the old base station practically becomes excessively large during the soft hand-off operation and, as a result, occurrence of interference among the radio channels is inescapable due to such excessive transmission power of a single mobile station.

[0012] It is an object of this invention to provide a transmission power control method which is used in a mobile station and which can prevent interference during a hand-off operation.

[0013] It is another object of this invention to provide a method of the type described, which can reduce an excessive increase of transmission power in the mobile station during the hand-off operation.

[0014] It is yet another object of this invention to provide a method of the type described, which is applicable to the mobile station in a CDMA cellular radio communication system.

[0015] It is still another object of this invention to provide a mobile station which is capable of reducing an increase of transmission power during a hand-off operation.

[0016] A method to which this invention is applicable is for use in controlling transmission power in a mobile station which is used in a CDMA radio communication system. The CDMA radio communication system comprises a plurality of base stations each of which transmits a pilot signal pre-assigned to each base station and a control signal for power control of the mobile station. The mobile station successively controls transmission power in response to the control signal sent from each of the base stations during communication with the base stations. According to an aspect of this invention, the method comprises the steps of periodically detecting, in the mobile station, a level of each pilot signal sent from the plurality of the base stations, checking out whether or not the mobile station is being connected to the plurality of the base stations,

discriminating between a first group of the base stations under connection and a second group of the base stations under non-connection, comparing a first reception level of the pilot signals concerned with the first group of the base stations with a second reception level of the pilot signals concerned with the second group of the base stations to determine whether or not the first reception level is higher than the second reception level, and suppressing an increase of the transmission power in the mobile station by reducing the transmission power when the second reception level exceeds the first reception level.

[0017] When each of the mobile stations comprises first transmission power control means for adjusting the transmission power on the basis of a reception level concerned with the pilot signals and second transmission power control means for controlling the transmission power by a control step size on the basis of a control instruction sent from the base stations under connection, the method according to another aspect of this invention comprises the steps of receiving the pilot signals from the plurality of the base stations, determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals, judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceeds a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement, changing the control step size from one to another when the second reception level exceeds and does not exceed the first reception level.

[0018] The changing step may comprise the steps of decreasing the control step size when the second reception level exceeds the first reception level and increasing the control step size when the second reception level does not exceed the first reception level.

[0019] Alternatively, the changing step comprises the steps of rendering the control step size into a small step size for an increase of the transmission power when the second reception level exceeds the first reception level and rendering the control step size into a large step size for a decrease of the transmission power when the second reception level does not exceed the first reception level.

[0020] According to a further aspect of this invention, the method comprises the steps of receiving the pilot signals from the plurality of the base stations; determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals, judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceed a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement, minimizing the transmission power at every time interval for a predetermined time period when the second reception level exceeds the first reception level, and executing a control operation by the use of the first and the second transmission power control means either during a time period except the predetermined period or when the second reception level does not exceed the first reception level.

[0021] According to yet another aspect of this invention, the method comprises the steps of receiving the pilot signals from the plurality of the base stations, determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals, judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceeds a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement, decreasing the transmission power in the mobile station by a predetermined amount at every preselected time interval when the second reception level of the pilot signals exceeds the first reception level, and executing a control operation by the use of the first and the second transmission power control means either during the preselected time interval or when the second reception level does not exceed the first reception level.

[0022] Herein, the transmission power in the first transmission power control means may be determined in inverse proportion to a reception level concerned with a whole of the pilot signals.

[0023] According to still another aspect of this invention, the method comprises the steps of periodically detecting each pilot signal level from a plurality of base stations, checking out whether or not the base stations are under connection to discriminate between a first group of the base stations under connection and a second group of the base stations under non-connection, and reducing the transmission power in the mobile station to suppress an increase of the transmission power in the mobile station when a first reception level concerned with the first group of the base stations does not exceed a second reception level concerned with the second group of the base stations.

[0024] A method to which this invention is also applicable is for use in controlling transmission power in a mobile station in a radio communication system which comprise a plurality of base stations. The mobile station is continuously communicable through radio channels with the base stations by executing a hand-off operation during a hand-off time. According to another aspect of this invention, the method comprises the steps of detecting the hand-off time and lowering the transmission power in the mobile station during the hand-off time to mitigate interference among the radio channels.

[0025] A mobile station to which this invention is applicable is for use in a communication system which comprise a plurality of base stations. The mobile station is continuously communicable through radio channels with the base stations by executing a hand-off operation during a hand-off time. According to this invention, the mobile station comprises means for detecting the hand-off time and means for lowering the transmission power in the mobile station during the hand-off time to mitigate interference among the radio channels.

Fig. 1 is a block diagram of a base station for use in a conventional CDMA cellular mobile radio communication system;

Fig. 2 is a flow chart for use in describing transmission power control operation of a conventional mobile station which is communicable with the base station illustrated in Fig. 1;

Fig. 3 shows a relationship of positions between base stations and a mobile station;

Fig. 4 is a time chart for use in describing the disadvantage of the conventional mobile station;

Fig. 5 is a block diagram of a mobile station which is operable in accordance with a method of this invention;

Fig. 6 is a flow chart for use in describing a method according to a first embodiment of this invention;

Fig. 7 shows a time chart for use in describing operation of the mobile station illustrated in Figs. 5 and 6;

Fig. 8 is a flow chart for use in describing a method according to a second embodiment of this invention;

Fig. 9 is a flow chart for use in describing a method according to a third embodiment of this invention;

Fig. 10 is a flow chart for use in describing a method according to a fourth embodiment of this invention; and

Fig. 11 is a flow chart for use in describing a method according to a fifth embodiment of this invention.

[0026] Referring to Figs. 1 and 2, description will be made about a conventional CDMA cellular mobile radio communication system for a better understanding of this invention. The conventional CDMA cellular mobile radio communication system has a plurality of base stations each of which has a structure illustrated in Fig. 1 and a plurality of mobile stations operable in a manner to be described with reference to Fig. 2.

[0027] As shown in Fig. 1, each base station is supplied with a mobile station signal from the mobile stations through a duplexer 201. The mobile station signal received through the duplexer 201 is sent through a radio frequency (RF) portion 202 to a signal level measurement unit 203 to measure a reception level of a desired signal included in the mobile station signal and to produce a measured reception level.

[0028] A comparator 204 compares the measured reception level with a predetermined signal level determined for the desired signal to produce a transmission power control bit representative of a result of comparison. The illustrated comparator 204 produces the transmission power control bit of "0" (as shown by 205) when the measured reception level exceeds the predetermined signal level. On the other hand, the illustrated comparator 204 produces the transmission power control bit of "1" (as shown by 206) when the measured reception level does not exceed the predetermined signal level. Herein, it is to be noted that the transmission power control bit of "0" indicates a decrease of transmission power in the mobile station under connection while the transmission power control bit of "1" indicates an increase of transmission power in the mobile station in question.

[0029] The transmission power control bit is inserted within a sequence of transmission data symbols sent from a transmission data generator 208. At any rate, such a transmission power control bit is delivered to the mobile station which switches the base stations from one to another during movement. As mentioned before, the soft hand-off operation is performed about a single mobile station and a plurality of base stations in the CDMA cellular mobile communication system to switch the base stations. Therefore, each mobile station must receive the transmission power control bits on the soft hand-off operation from a plurality of the base stations related to the soft hand-off operation. This means that the transmission power control bit sent from each base station must be discriminated from one to another by the mobile station.

[0030] In view of this fact, a transmission power control bit allocation unit 207 is operated to allocate each transmission power control bit to symbol position which is pre-assigned to each base station at every time slot of the transmission data symbol sequence. Thus, the transmission data symbol sequence which includes the transmission power control bit is given to a spectrum spreader 210 which has a spread code peculiar to the base station and is produced as a spectrum spread data sequence.

[0031] On the other hand, the illustrated base station has a pilot signal generator 209 which produces a spectrum spread pilot signal subjected to spectrum spreading by the use of a spread code which is common to all of the base stations. In the illustrated example, the spectrum spread pilot signal is peculiar to each base station at a time instant. This shows that the spectrum spread pilot signals from the respective base stations are generated with time offsets and are therefore arranged at different time instants. In any event, each pilot signal is generated at a predetermined power level from each base station and may be called a constant power signal.

[0032] The above-mentioned spectrum spread data sequence is added to the spectrum spread pilot signal by an adder 211 and is transmitted through a modulator 212, an amplifier 213, and the duplexer 201 to the mobile stations as a sequence of base station signals.

[0033] The base station signal sequence is received as a mobile reception signal by each of the mobile stations. Herein, it is kept in mind that each mobile station executes first and second types of transmission power control as mentioned in the preamble of the instant specification and has first and second power control loops for the first and the second types of the transmission power control, respectively. To this end, the first and the second power control loops are used to control transmission power in each mobile station by a transmission power controller in a manner to be described with reference to Fig. 2 below.

[0034] At first, each mobile station is assumed to be given first through N-th pilot signals from first through N-th ones of the base stations, respectively, where N is a positive integer. It is needless to say that each pilot signal is subjected to the spectrum spreading and is included in each base station signal, as mentioned before. Under the circumstances, the transmission power controller detects a maximum one of reception levels P11 - P1N of the first through the N-th pilot signals to determine the maximum reception level Pm, as shown at a first step S31.

[0035] Next, the transmission power controller is operable to decide transmission power of the mobile station so that no interference takes place in the other mobile stations or other radio channels. For this purpose, the first type of the transmission power control is executed by the transmission power controller by the use of a reception level D1 which is received by each base station and which is determined for a desired wave. Specifically, transmission power Popn of the mobile station for the first type of the transmission power control is determined at a second step S32 so that the reception level in the base station becomes equal to D1 in accordance with the following Equation (1). The transmission power Popn for the first type of the transmission power control may be called open loop transmission power hereinafter.

$$Popn = (Pt/Pm) \times D1, \quad (1)$$

where Pt is representative of the transmission power of each pilot signal sent from each base station and is assumed to be equal to one another in all of the base stations. In Equation (1), a reciprocal of (Pt / Pm), namely, (Pm / Pt) is representative of a transmission loss between the mobile station and each base station.

[0036] At a third step S33, the open loop transmission power Popn is compared by the transmission power controller with maximum transmission power Pomax which is transmissible in the first type of the transmission power control and which may be called open loop maximum transmission power.

[0037] When the open loop transmission power Popn exceeds the maximum transmission power Pomax, the open loop transmission power Popn is rendered into Pomax at a fourth step S34. Otherwise, the third step S33 proceeds to a fifth step S35 at which the open loop transmission power Popn is compared with minimum transmission power Pomin which is transmissible in the first type of the transmission power control. If Popn is smaller than Pomin, Popn is rendered into Pomin at a sixth step S36. From this fact, it is readily understood that the open loop transmission power Popn is restricted within a range between the maximum transmission power Pomax and the minimum transmission power Pomin by the first type of the transmission power control.

[0038] Subsequently, judgement is made at a seventh step S37 about the transmission power control bits which are sent from the base stations under connection. Thus, the second type of the transmission power control is started by the transmission power controller. Herein, it is assumed that the mobile station in question is connected to first through M-th base stations which are selected from the first through the N-th base stations. In this connection, M is equal to or smaller than N. At the seventh step S37, it is judged whether or not all of the transmission control bits sent from the first through the M-th base stations are equal to "1". When the transmission control bit of "0" is included, the seventh step S37 is followed by an eighth step S38 at which transmission power Pcd for the second type of the transmission power control is reduced by a power control step size ΔPF determined for the second type of the transmission power control. The transmission power Pcd may be referred to as closed loop transmission power.

[0039] On the other hand, when all of the transmission control bits sent from the first through the M-th base stations

are equal to "1", the seventh step S37 is succeeded by a ninth step S39 at which the closed loop transmission power P_{cld} is increased by the power control step size ΔPF .

[0040] Thereafter, the closed loop transmission power P_{cld} is compared at a tenth step S40 with maximum transmission power P_{cmax} which is transmissible in the second type of the transmission power control and which may be called closed loop maximum transmission power. If the closed loop transmission power P_{cld} exceeds the closed loop maximum transmission power P_{cmax} , the tenth step S40 proceeds to an eleventh step S41 at which P_{cld} is rendered into P_{cmax} . Otherwise, the tenth step S40 is followed by a twelfth step S42 at which the closed loop transmission power P_{cld} is compared with minimum transmission power P_{cmin} which is transmissible in the second type of the transmission power control and which may be called closed loop minimum transmission power. If P_{cld} is smaller than P_{cmin} , P_{cld} is made to be equal to P_{cmin} . Thus, the closed loop transmission power is adjusted to a range between the closed loop maximum transmission power P_{cmax} and the closed loop minimum transmission power P_{cmin} .

[0041] In any event, excessive transmission power is often transmitted from each mobile station to the base station under connection during the soft hand-off operation when the first and the second types of transmission power control are executed in each mobile station.

[0042] Referring to Fig. 3, let a mobile station MS01 carry out communication through a base station BS#1 located on a building B05 and move along a road R1 upwards of Fig. 3. When the mobile station MS01 passes through a building B01 and moved to an area A01 where visibility is good by a base station BS#2 which is located on a building B02 and which is not connected ever before. In this condition, it often happens that a transmission loss between the mobile station MS01 and the base station BS#2 becomes smaller than that between the mobile station MS01 and the base station BS#1 which is now connected to the mobile station MS01. Inasmuch as each pilot signal that is sent from the base stations and that is measured by the mobile station MS01 has a reception level which is in inverse proportion to the transmission loss, the measurement result of the mobile station MS01 in the area A01 is that the reception level of the pilot signal of the base station BS#2 is higher than that of the pilot signal of the base station BS#1.

[0043] In this event, the mobile station MS01 executes the first type of the transmission power control with reference to the maximum reception level of the pilot signal so that the transmission power P_{opn} is quickly reduced. Simultaneously, processing is started in the mobile station MS01 to connect the mobile station MS01 to the base station BS#2 which has the minimum transmission loss.

[0044] Referring to Fig. 4, transmission power of the mobile station MS01 is varied in the above-mentioned case. More specifically, the pilot signal reception level of the base station BS#2 in the mobile station MS01 abruptly exceeds the pilot signal reception level of the base station BS#1 at a time instant T1, as shown in Fig. 4. Therefore, the mobile station MS01 quickly reduces the transmission power by carrying out the first type of the transmission power control. At the same time, connection to the base station BS#2 is started by the mobile station MS01 with the connection to the base station BS#1 held in the mobile station MS01. In this case, it takes a time D_h to connect the mobile station MS01 to the base station BS#2. The time D_h may be referred to as a hand-off time.

[0045] During the time D_h , the transmission power is increased again, as shown in Fig. 4, on the basis of a transmission power control command sent from the base station BS#1 which is held at a connected state. When connection is completed between the mobile station MS01 and the base station BS#2 at a time instant T2, the mobile station MS01 starts the transmission power control operation on the basis of a command sent from the base station BS#2 and reduces the transmission power in accordance with the command from the base station BS#2.

[0046] As mentioned before, communication is carried out with excessive transmission power during the time D_h necessary for connection to the base station BS#2. This is because the transmission power is governed during the time D_h by the connected base station BS#1 in spite of the fact that the transmission power is once reduced at the time instant T1 in accordance with the base station BS#2 which exhibits the minimum transmission loss. This gives rise to interference for the base station BS#2 during the time D_h . Such interference brings about serious problem in the CDMA cellular mobile radio communication system which occupies the same frequency by a plurality of base stations. In other words, excessive transmission power of only one mobile station leads to interference among the plurality of the base stations, as pointed out in the preamble of the instant specification.

[0047] Referring to Figs. 5 and 6, description will be made about a transmission power control method according to a first embodiment of this invention. The transmission power control method is executed in a mobile station as illustrated in Fig. 5. In Fig. 5, the illustrated mobile station has a transmission signal generator 101 which produces a transmission signal of a radio frequency subjected to spectrum spreading. The transmission signal is amplified by first and second variable amplifiers 102 and 103 and is thereafter sent to a duplexer 104 to be transmitted as the mobile station signal sequence. The first and the second variable amplifiers 102 and 103 are used for the first and the second types of the transmission power control, respectively, and are controlled by a transmission power controller (CTL) 100. Specifically, the first and the second variable amplifiers 102 and 103 are supplied from the CTL 100 with the open loop transmission power P_{opn} and the closed loop transmission power P_{cld} , as mentioned in conjunction with Fig. 2, respectively.

[0048] On the other hand, a base station transmission signal is received as a mobile station reception signal and is delivered from the duplexer 104 to a radio frequency portion 105 and a down converter 106 to be converted into a

sequence of base band signals. In the illustrated example, the base band signal sequence conveys first through N-th pilot signals P11-P1N sent from the first through the N-th base stations and first through M-th transmission power control bits Bpc1-BpcM sent from the first through the M-th base stations under connections, as mentioned before. Herein, the first through the N-th base stations stand for base stations from which the pilot signals can be received and are usually different in number from the first through the M-th base stations. This is because transmission power of each pilot signal is generally greater than that of a data signal sequence between each mobile station and each base station.

[0049] In Fig. 5, the base band signal is delivered through a de-spreading unit da0 and a demodulator dc0 to a transmission power bit detector bd0 on one hand. The transmission power bit detector bd0 detects the first through the M-th transmission bits Bpc1 to BpcM and sends the same to the CTL 100. Likewise, the base band signal is also delivered to a pilot level detector ld0 through a filter mf0 matched with a spread code predetermined for each pilot signal and a path detector pd0. The pilot level detector ld0 measures the first through the N-th pilot signals P11 - P1N to determine a maximum reception level of the first through the N-th pilot signals.

[0050] Now, the transmission power controller (CTL) 100 illustrated in Fig. 5 is operable in the manner shown in Fig. 6. In Fig. 1, first and second blocks FST and SND are representative of operations related to the first and the second types of the transmission power control that may be called an open loop type and a closed loop type, respectively. Herein, it is to be noted that the first through the N-th base stations are divided or classified into base stations (first through M-th base stations) under connection (will be collectively called a first group base station) and base stations under non-connection (will be called a second group base station) which are equal in number to N-M.

[0051] At first, the CTL 100 determines the maximum reception level Pm among the first through the N-th pilot signals P11 to P1N at a first step S01. At the first step S01, the illustrated CTL 100 selects the base stations (first through M-th base stations) under connection and calculates a first weighted sum Pac of the reception levels of the pilot signals sent from the base stations under connection. In addition, a second weighted sum Pau of the reception levels is calculated at the first step S01 in connection with the pilot signals sent from the base stations under non-connection. The base stations under connection may be called a first group of base stations and may be single or plural while the base stations under non-connection may be called a second group of base stations and may be also single or plural. In addition, a weight may be common to each reception level.

[0052] In any event, the first and the second weighted sums Pac and Pau are given by:

$$Pac = \sum_{i=1}^N k_i \times f_c(i) \times P_{1i} \quad (2)$$

and

$$Pau = \sum_{i=1}^N k_i \times \{1 - f_c(i)\} \times P_{1i} \quad (3)$$

where

$f_c(i) = 1$ (when the mobile station is being connected to an i-th base station)
 $= 0$ (when it is not connected to the i-th base station yet).

[0053] In Equations (2) and (3), k_i is representative of a weight coefficient assigned to the i-th base station; and P_{1i} , the reception level of the pilot signal sent from the i-th base station. Each weight coefficient k_i may be set to a common value of "1" or may be equal to P_{1i} . Alternatively, k_i may be determined in the following manner. Namely, $k_{cm} = 1$, $k_{um} = 1$, and $k_i = 0$ (i is not equal to both of the numbers cm and um), where cm is representative of the number assigned to the base station which has a maximum level of P_{1i} within the base stations of $f_c(i) = 1$; um is representative of the number assigned to the base station which has a maximum level of P_{1i} within the base stations of $f_c(i) = 0$.

[0054] Referring back to Fig. 6, the CTL 100 illustrated in Fig. 5 completes the first step S01 and proceeds to a second step S02 at which the open loop transmission power Popn for the open loop control is calculated like at the second step S32 of Fig. 2 in accordance with Equation (1) so that the reception level in each base station becomes equal to D1. Thereafter, the second step S02 is succeeded by a third step S03 at which the open loop transmission power Popn is compared in the CTL 100 with the open loop maximum transmission power Pomax which is transmissible in the open loop transmission power control. If the open loop transmission power Popn exceeds the open loop maximum transmission power Pomax, the third step S03 is followed by a fourth step S04 at which Popn is rendered into Pomax, like at the fourth step S34 in Fig. 2.

[0055] Otherwise, the third step S03 proceeds to a fifth step S05 at which P_{opn} is compared with the open loop minimum transmission power P_{min} which is transmissible in the open loop transmission power control. When P_{opn} is smaller than P_{min} , a sixth step S06 succeeds the fifth step S05 to make P_{opn} equal to P_{min} .

[0056] Subsequently, a seventh step S07 is executed to judge whether or not the second weighted sum P_{au} exceeds the first weighted sum P_{ac} . Namely, judgement is made at the seventh step S07 about the formula $P_{au} > P_{ac}$, as illustrated in Fig. 6.

[0057] Let the second weighted sum P_{au} be smaller than the first weighted sum P_{ac} . This shows that the transmission power of the base stations under connection is greater than that of the base stations under non-connection and that the base stations may not be switched from the first group of the base stations to the second group of the base stations. In this event, the seventh step S07 is succeeded to an eighth step S08 at which a transmission power control step size is rendered into ΔPL which may be named a first control step size.

[0058] On the other hand, when the second weighted sum P_{au} exceeds the first weighted sum P_{ac} , namely, $P_{au} > P_{ac}$, the seventh step is followed by a ninth step S09 at which the transmission power control step size is rendered into ΔPS which is smaller than ΔPL and which may be named a second control step size. From this fact, it is readily understood that the transmission power step size becomes small when the second weighted sum P_{au} related to the base stations under non-connection exceeds the first weighted sum P_{ac} related to the base stations under connection and that the transmission power is slowly or gradually increased in the mobile station in accordance with ΔPS in a case as mentioned in conjunction with Fig. 3.

[0059] At a tenth step S10, the CTL 100 judges whether or not the transmission power control bits B_{pc1} - B_{pcM} sent from the first through the M-th base stations under connection are all equal to "1". Let any one of the control bits B_{pc1} - B_{pcM} be not equal to "1". This shows that the transmission power must be decreased by the mobile station to avoid interference due to excessive transmission power in either one of the base stations under connection. Taking this into consideration, the tenth step S10 is succeeded by an eleventh step S11 at which the closed loop transmission power P_{cd} is decreased by a transmission power control step size ΔP which is determined for the second type or the closed loop transmission power control and which may be referred to as a third control step size.

[0060] If all the control bits B_{pc1} - B_{pcM} are equal to "1", the closed loop transmission power P_{cd} is increased at a twelfth step S12 by the third control step size ΔP . The third control step size ΔP may be equal to the first control step size ΔPL when $P_{au} < P_{ac}$ while the third control step size ΔP may be equal to the second control step size when $P_{au} > P_{ac}$.

[0061] At a thirteenth step S13, the closed loop transmission power P_{cd} obtained by the above steps is compared with the closed loop maximum transmission power P_{cmax} which is transmissible in the second type of the transmission power control. When P_{cd} exceeds P_{cmax} , the closed loop transmission power P_{cd} is made to be equal to P_{cmax} at a fourteenth step S14. Otherwise, the thirteenth step S13 is succeeded by a fifteenth step S15 at which the closed loop transmission power P_{cd} is compared with the closed loop minimum transmission power P_{cmin} . If P_{cd} is smaller than P_{cmin} , the closed loop transmission power is rendered into P_{cmin} at a sixteenth step S16. At any rate, the closed loop transmission power P_{cd} is adjusted to a range between the closed loop maximum transmission power P_{cmax} and the closed loop minimum transmission power P_{cmin} , like in Fig. 2.

[0062] Herein, it is assumed that the method mentioned with reference to Figs. 5 and 6 is applied to the case illustrated in Fig. 2. In this case, the reception levels of the pilot signals sent from the base stations BS#1 and BS#2 are varied together with the transmission power (depicted at TP) of the mobile station in the manner illustrated in Fig. 7.

[0063] More specifically, the mobile station is given the pilot signals which are sent from the base stations BS#1 and BS#2 and which are received with reception levels depicted at R1 and R2 in Fig. 7, respectively. The reception levels R1 and R2 may be referred to as first and second reception levels, respectively.

[0064] In Fig. 7, the second reception level R2 suddenly exceeds the first reception level R1 at a time instant T1. In this situation, the transmission power TS of the mobile station MS02 is quickly reduced due to the open loop transmission power control, as shown in Fig. 7. Concurrently, the mobile station MS01 starts connecting operation to the base station BS#2 at the time instant T1. Thereafter, the mobile station MS01 starts communication with the base station BS#2 after lapse of the time D_h . As a result, the time D_h may be considered as a hand-off time, namely, a soft hand-off time.

[0065] As shown in Fig. 7, the transmission power TP is gradually increased during the hand-off time D_h at the control step size ΔP which is equal to the second control step size ΔPS smaller than the first control step size ΔPL . Therefore, an increase of the transmission power TP is slow during the hand-off time, which is useful to suppress excessive transmission power and to remarkably reduce interference for the base station BS#2 which gives a minimum transmission loss and which is now being connected to the mobile station MS01.

[0066] Anyway, it is readily understood that the method according to this invention may detect the hand-off time and lower the transmission power during the hand-off time to mitigate interference among the radio channels defined by a common frequency.

[0067] In the second block SND illustrated in Fig. 6, the control step size is reduced irrespective of an increase or a

decrease of the transmission power. However, the control step size may be reduced only when the transmission power is increased to save excessive transmission power.

[0068] Referring to Fig. 8, description will be made about a method according to a second embodiment of this invention which is specified by a single block SND which corresponds to the block SND illustrated in Fig. 6. This means that the remaining processes or steps are equivalent to the method shown in Fig. 6.

[0069] In Fig. 8, a step S50 is executed after the fifth, the sixth, or the fourth step S05, S06, or S04 to judge whether or not Pau exceeds Pac. When Pau is smaller than Pac, the step S50 is followed by a step S51 which uses a transmission power increment step size $\Delta P+$. Specifically, the transmission power increment step size $\Delta P+$ is rendered into the control step size ΔP at the step S51.

[0070] On the other hand, when Pau exceeds Pac, the step S5 proceeds to a step S52 at which the transmission power control step size $\Delta P+$ is rendered into a control step size ΔP_s+ which is smaller than ΔP . In this event, when the control step size ΔP_s+ becomes equal to 0 dB, an increase of the transmission power can be prohibited in the mobile station while the control step size ΔP_s+ is kept at 0 dB.

[0071] Subsequently, it is judged at a step S53 whether or not the transmission power control bits Bpc1-BpcM are all equal to "1". When either one of the transmission power control bits Bpc1-BpcM does not take "1", the step S53 is succeeded by a step S54 at which the closed loop transmission power Pcd is decreased by ΔP . Otherwise, the step S53 is followed by a step S55 at which the closed loop transmission power Pcd is increased by $\Delta P+$ which is determined for the closed loop.

[0072] As mentioned before, the control step size is varied to suppress an influence of an increase or a decrease of the transmission power. Alternatively, average transmission power may be controlled to prevent the above-mentioned interference. Such average transmission power may be controlled by keeping the control step size at a fixed size and by minimizing transmission power of the mobile station for a predetermined time interval at a prescribed time period.

[0073] Referring to Fig. 9, a method according to a third embodiment of this invention controls transmission power of each mobile station by the use of average transmission power in the above-mentioned manner. In Fig. 9, illustration is made only about procedure which is executed by the mobile station after the fifth, the sixth, or the fourth step S05, S06, or S04 shown in Fig. 6.

[0074] In Fig. 9, a step S60 is for judging whether or not the transmission power control bits Bpc1-BpcM of the base stations under connection are all equal to "1". When the transmission power control bit of "0" is included in the transmission power control bits Bpc1-BpcM, the step S60 is succeeded by a step S61 at which closed loop transmission power (depicted at Pcd' in Fig. 9) is decreased by ΔP to be rendered into new closed loop transmission power Pcd'. When all the transmission power control bits Bpc1-BpcM are equal to "1", the closed loop transmission power Pcd' is increased by ΔP at a step S62 to be rendered into new closed loop transmission power Pcd'.

[0075] Subsequently, a step S63 is executed to judge whether or not Pau exceeds Pac. If Pau exceeds Pac, the step S63 is followed by a step S64 to judge whether or not the following equation (4) holds. Herein, Equation (4) is given by:

$$[(t/T_m) - \text{int}(t/T_m)] \times T_m < k \times T_m, \quad (4)$$

where t is representative of an absolute current time measured at a transmission power control period; T_m is representative of a power reduction period of the second type of transmission power control and is defined by a time measured at the transmission power control period; and k ($=0 - 1$) is representative of a reduction duration which is determined for the second type of the transmission power control and which is given by a rate to T_m .

[0076] When Equation (4) holds at the step S64, the step S64 proceeds to a step S65 at which the open loop transmission power Popn and the closed loop transmission power Pcd are rendered into open loop and closed loop minimum transmission power Pomin and Pmin, respectively. Otherwise, the closed loop transmission power Pcd is rendered into Pcd' at a step S66.

[0077] Each of the steps S65 and S66 is followed by a step S67 at which the closed loop transmission power Pcd' is compared with the closed loop maximum transmission power Pcmx which is transmissible in the second type of the transmission power control. If Pcd' exceeds Pcmx, Pcd' is made to be equal to Pcmx at a step S68.

[0078] Otherwise, Pcd' is compared at a step S69 with closed loop minimum transmission power Pmin which is transmissible in the second type of the transmission power control. If Pcd' is smaller than Pmin, the closed loop transmission power Pcd' is made to be equal to Pmin at a step S70.

[0079] Alternatively, it is possible to suppress interference for the base station which gives a minimum transmission loss, by periodically reducing transmission power in each mobile station by a predetermined rate, with the transmission step size kept constant in the second type transmission power control.

[0080] Referring to Fig. 10, a method according to a fourth embodiment of this invention will be described which is operable in the manner mentioned above. In Fig. 10 also, the second block SND alone is illustrated like in Fig. 8. Specifically, judgement is made at a step S71 about whether or not the transmission power control bits Bpc1 to BpcM of the base stations under connection are all equal to "1". When all the transmission power control bits Bpc1 to BpcM are not

equal to "1", the closed loop transmission power P_{cld} is decreased by ΔP to render the decreased power into new closed loop transmission power P_{cld} at a step S72. On the other hand, when the transmission power control bits B_{pc1} to B_{pcM} are equal to "1", the step S71 is followed by a step S73 at which the closed loop transmission power P_{cld} is increased by ΔP to define increased closed loop transmission power as new closed loop transmission power P_{cld}.

5 [0081] Thereafter, P_{au} is compared at a step S74 with P_{ac} to judge whether or not the former exceeds the latter. If P_{au} exceeds P_{ac}, the step S74 proceeds to a step S75 to judge whether or not the following equation (5) holds. Herein, Equation (5) is given by:

$$\text{int}(t/T_M) = 0, \quad (5)$$

10

where T_M is representative of a transmission power reduction period which is determined for the second type of the transmission power control and which is defined by a time which is measured at every transmission power control period.

15 [0082] When Equation (5) holds at the step S75, a step S76 is executed to decrease the closed loop transmission power P_{cld} by an attenuation amount ΔD of transmission power and is followed by the thirteenth step S13 shown in Fig. 6. Otherwise, the step S75 is directly succeeded by the thirteenth step S13.

[0083] In the meanwhile, the open loop transmission power P_{opn} for the first type transmission power control is determined by the use of the maximum reception level of the pilot signals. However, the open loop transmission power P_{opn} for the first type transmission power control may be determined with reference to a total weighted reception level of all the pilot signals.

20 [0084] Referring to Fig. 11, description will be made about a method according to a fifth embodiment of this invention which is operable in the above-mentioned manner and which is specified by a first block FST which corresponds to that of Fig. 6. At a step S80 in the first block FST, all reception levels of the first through the N-th pilot signals are used to define a maximum reception level P_m, to calculate the first weighted sum P_{ac} of the pilot signals sent from the base stations under connection, and to calculate the second weighted sum P_{au} of the pilot signals sent from the base stations under non-connection. Furthermore, the total weighted sum P_s of the reception levels of all the pilot signals P11 to P1N is also calculated at the step S80. Thereafter, the step S80 proceeds to a step S81 at which open loop transmission power P_{opn} for the first type transmission power control is determined by:

30

$$P_{opn} = (P_t/P_s) \times D1, \quad (6)$$

where D1 is representative of a reception level of a desired wave in a base station. In other words, the step S81 is executed to determine the open loop transmission power P_{opn} so that the reception level in the base station becomes equal to D1. Subsequently, the step S81 is followed by the third step S03 illustrated in Fig. 6.

35 [0085] The method illustrated in Fig. 11 is effective in the case where transmission losses are comparatively small in relation to a plurality of base stations, although they are larger than the minimum transmission loss concerned with the base station under connection. With the above-mentioned method, interference for the plurality of the base stations can be kept at a low level. This is because the total weighted sum of all the pilot signals are referenced on decision of the open loop transmission power P_{opn}.

40 [0086] While this invention has thus far been described in conjunction with several embodiments thereof, it will be readily possible for those skilled in the art to put this invention into practice in various other manners. For example, this invention is not restricted to the CDMA cellular mobile radio communication system but can be applied to a system which requires to reduce interference between radio channels. At any rate, the interference can be reduced among the radio channels by suppressing excessive transmission power in each mobile station with reference to reception levels of the pilot signals. Instead of the pilot signals, any other signals may be detected or monitored in the mobile station as the constant power signals generated at the constant power level by the base stations.

Claims

50 1. A method of controlling transmission power in a mobile station which is used in a CDMA cellular mobile radio communication system, said CDMA cellular mobile radio communication system comprising a plurality of base stations each of which transmits a pilot signal pre-assigned to each base station and a control signal for power control of the mobile station, said mobile station successively controlling transmission power in response to the control signal sent from each of the base stations during communication with the base stations, comprising the steps of:

55

periodically detecting, in the mobile station, a level of each pilot signal sent from the plurality of the base stations;

checking out whether or not the mobile station is being connected to the plurality of the base stations;

discriminating between a first group of the base stations under connection and a second group of the base stations under non-connection;

comparing a first reception level of the pilot signals concerned with the first group of the base stations with a second reception level of the pilot signals concerned with the second group of the base stations to determine whether or not the first reception level is higher than the second reception level; and

suppressing an increase of the transmission power in the mobile station when the second reception level exceeds the first reception level.

2. A method of controlling transmission power in a CDMA cellular mobile radio communication system which comprises a plurality of base stations each of which transmits a pilot signal pre-assigned to each base station and a plurality of mobile stations communicable with the base stations, each of the mobile stations comprising first transmission power control means for adjusting the transmission power on the basis of a reception level concerned with the pilot signals and second transmission power control means for controlling the transmission power by a control step size on the basis of a control instruction sent from the base stations under connection, comprising the steps of:

receiving the pilot signals from the plurality of the base stations;

determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals;

judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceeds a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement; and

changing the control step size from one to another when the second reception level exceeds or does not exceed the first reception level.

3. A method as claimed in claim 2, wherein the changing step comprises the steps of:

decreasing the control step size when the second reception level exceeds the first reception level; and

increasing the control step size when the second reception level does not exceed the first reception level.

4. A method as claimed in claim 2 or 3, wherein the changing step comprises the steps of:

rendering the control step size into a small step size for an increase of the transmission power when the second reception level exceeds the first reception level; and

rendering the control step size into a large step size for a decrease of the transmission power when the second reception level does not exceed the first reception level.

5. A method of controlling transmission power in a CDMA cellular mobile radio communication system which comprises a plurality of base stations each of which transmits a pilot signal pre-assigned to each base station and a plurality of mobile stations communicable with the base stations, each of the mobile stations comprising first transmission power control means for adjusting the transmission power on the basis of a reception level concerned with the pilot signals and second transmission power control means for controlling the transmission power by a control step size on the basis of a control instruction sent from the base stations under connection, comprising the steps of:

receiving the pilot signals from the plurality of the base stations;

determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals;

judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceeds a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement;

minimizing the transmission power at every time interval for a predetermined time period when the second reception level exceeds the first reception level; and

executing a control operation by the use of the first and the second transmission power control means either during a time period except the predetermined period or when the second reception level does not exceed the first reception level.

6. A method of controlling transmission power in a CDMA cellular mobile radio communication system which comprises a plurality of base stations each of which transmits a pilot signal pre-assigned to each base station and a plurality of mobile stations communicable with the base stations, each of the mobile stations comprising first trans-

mission power control means for adjusting the transmission power on the basis of a reception level concerned with the pilot signals and second transmission power control means for controlling the transmission power by a control step size on the basis of a control instruction sent from the base stations under connection, comprising the steps of:

5 receiving the pilot signals from the plurality of the base stations;
determining the transmission power in inverse proportion to a maximum one of reception levels of the pilot signals;
judging whether or not a first reception level of the pilot signals concerned with the base stations under connection exceeds a second reception level of the pilot signals concerned with the base stations under non-connection to produce a result of judgement;
10 decreasing the transmission power in the mobile station by a predetermined amount at every preselected time interval when the second reception level of the pilot signals exceeds the first reception level; and
executing a control operation by the use of the first and the second transmission power control means either during the preselected time interval or when the second reception level does not exceed the first reception level.
15

7. A method as claimed in any one of claims 2 to 6, wherein the transmission power in the first transmission power control means is determined in inverse proportion to a reception level concerned with a whole of the pilot signals.

20 8. A method of controlling transmission power in a mobile station in a CDMA cellular mobile radio communication system, comprising the steps of:

detecting each pilot signal level from a plurality of base stations;
checking out whether or not the base stations are under connection to discriminate between a first group of the base stations under connection and a second group of the base stations under non-connection; and
25 reducing the transmission power in the mobile station to suppress an increase of the transmission power in the mobile station when a first reception level concerned with the first group of the base stations does not exceed a second reception level concerned with the second group of the base stations.

30 9. A method as claimed in any one of claims 1 to 8, wherein the detecting step is periodically carried out in the mobile station.

10. A method of controlling transmission power in a mobile station in a radio communication system which comprise a plurality of base stations, the mobile station being continuously communicable through radio channels with the base stations by executing a hand-off operation during a hand-off time, comprising the steps of:
35

determining the hand-off time; and
lowering the transmission power in the mobile station during the hand-off time to mitigate interference among the radio channels.
40

11. A method as claimed in claim 10, wherein the hand-off time detecting step comprises the steps of:

receiving a plurality of constant power signals each of which is sent from each base station at a predetermined power level; and
45 determining the hand-off time with reference to each reception level of the pilot signals.

12. A method as claimed in claim 11, wherein each of said constant power signals is specified by a pilot signal sent from each base station.

50 13. A method as claimed in claim 11 or 12, wherein the determining step comprises the steps of:

classifying the base stations into a first group base station under connection and a second group base station under non-connection;
comparing a first reception level concerned with the first group base station with a second reception level concerned with the second group base station to judge whether or not the second reception level exceeds the first reception level; and
55 deciding the hand-off time when the second reception level exceeds the first reception level.

14. A method as claimed in claim 10, 11, 12 or 13, wherein the radio channels are defined by a common frequency.

15. A method as claimed in any one of claims 1-14, wherein each of the first and the second reception levels is determined by a weighted sum of the reception levels of the pilot signals.

5

16. A mobile station for use in a communication system which comprise a plurality of base stations, the mobile station being continuously communicable through radio channels with the base stations by executing a hand-off operation during a hand-off time, comprising:

10 means for determining the hand-off time; and
means for lowering the transmission power in the mobile station during the hand-off time to mitigate interference among the radio channels.

15

20

25

30

35

40

45

50

55

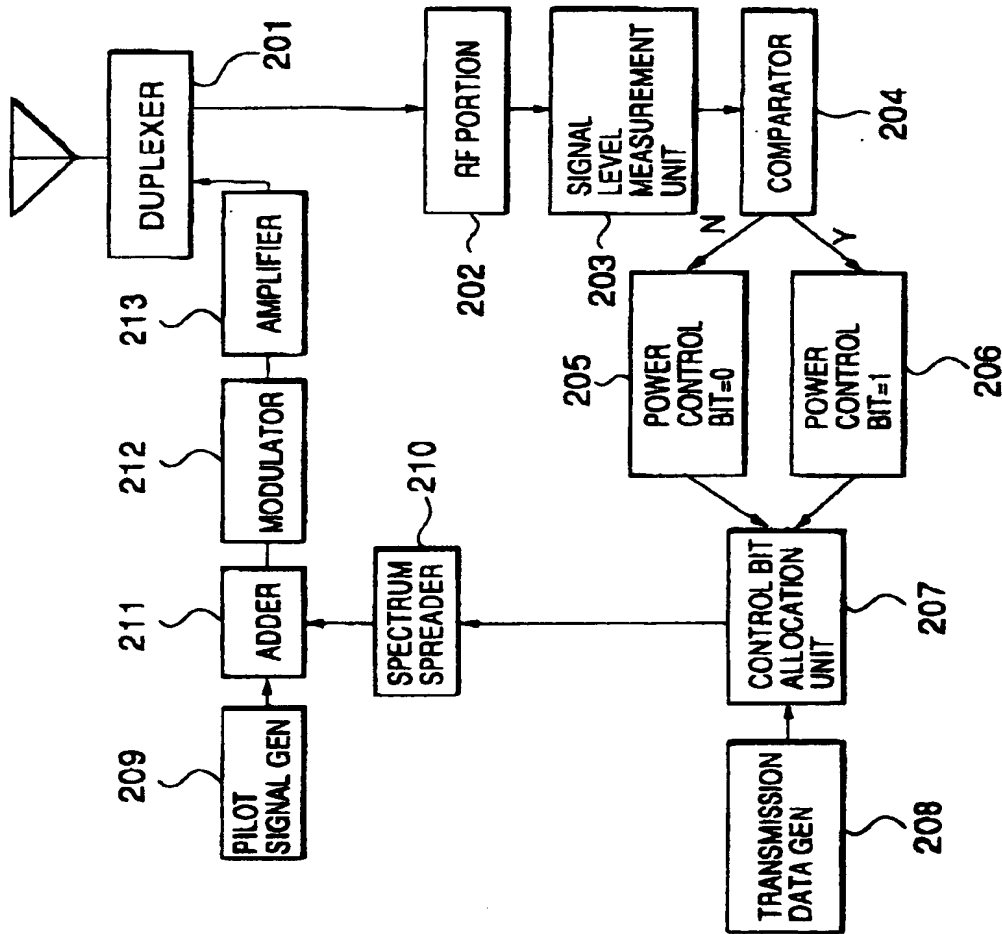


Fig.1
PRIOR ART

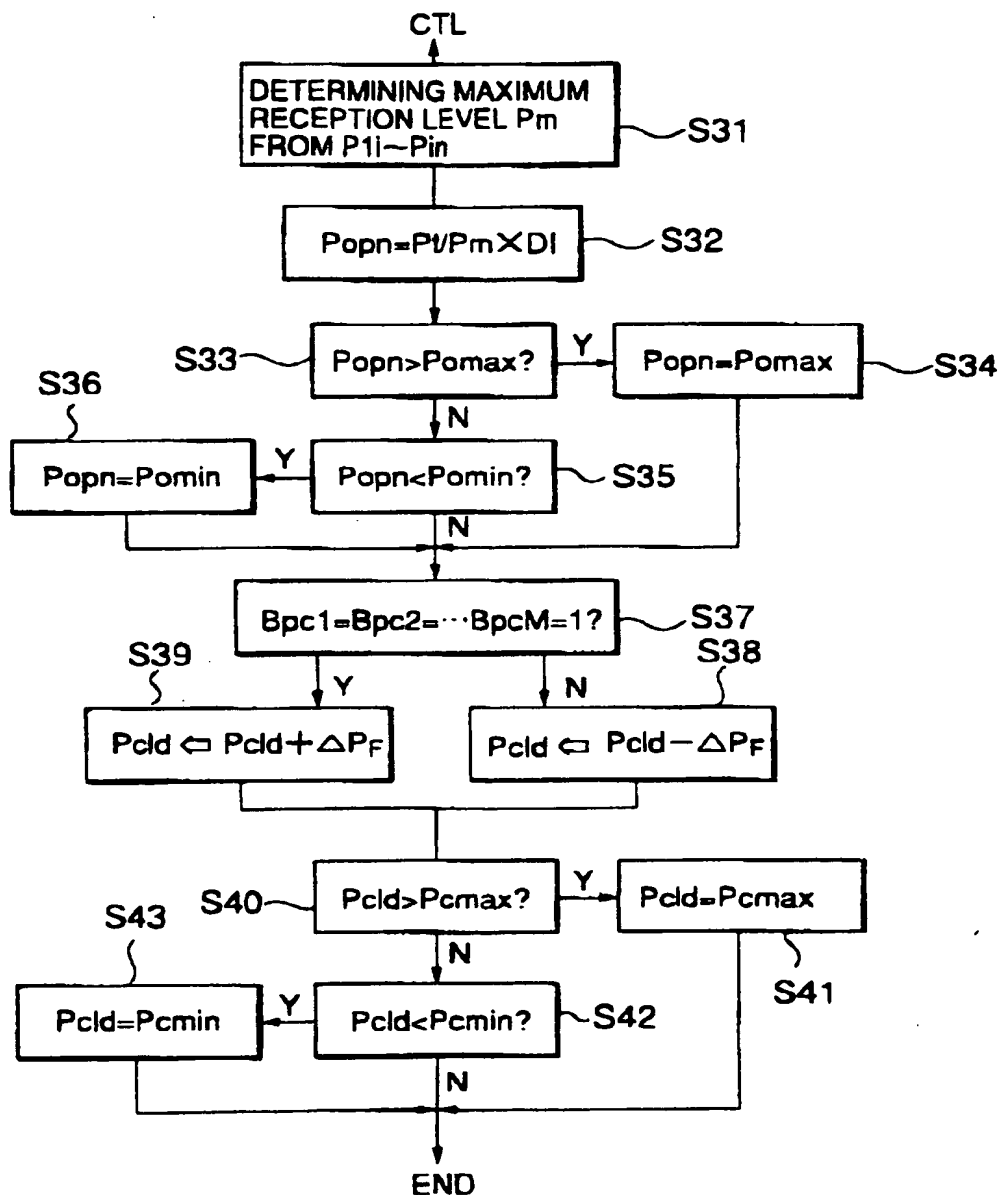


Fig.2
PRIOR ART

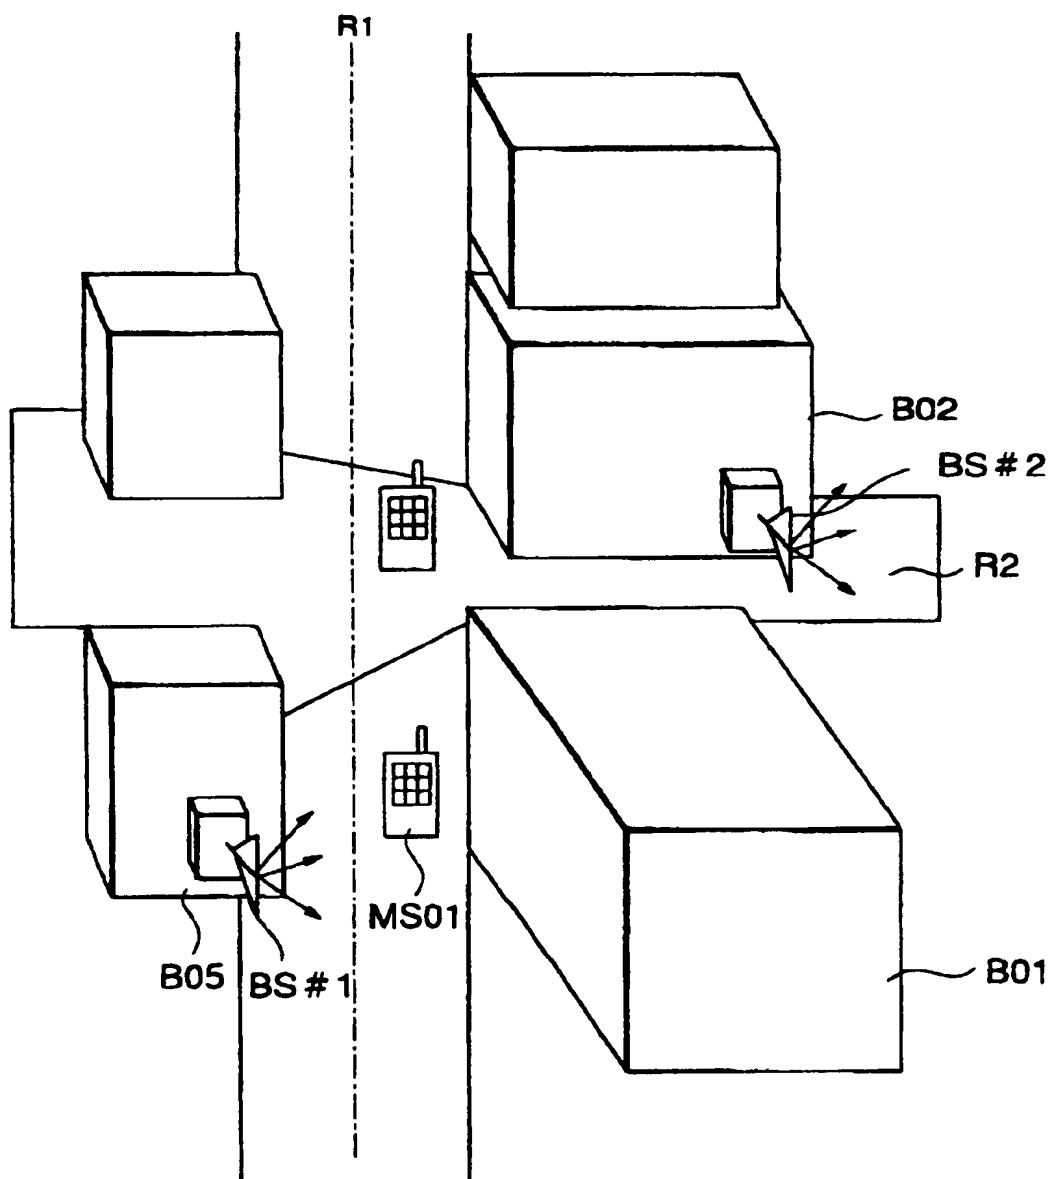


Fig.3

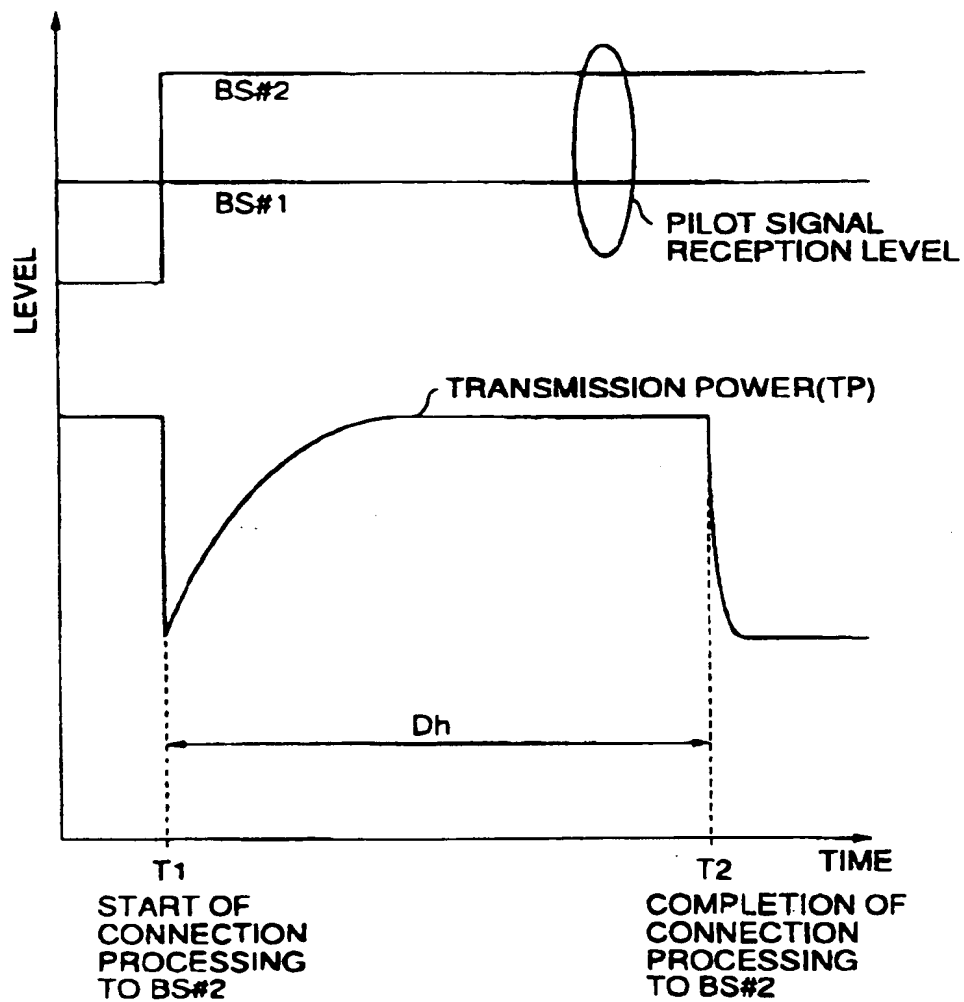


Fig.4

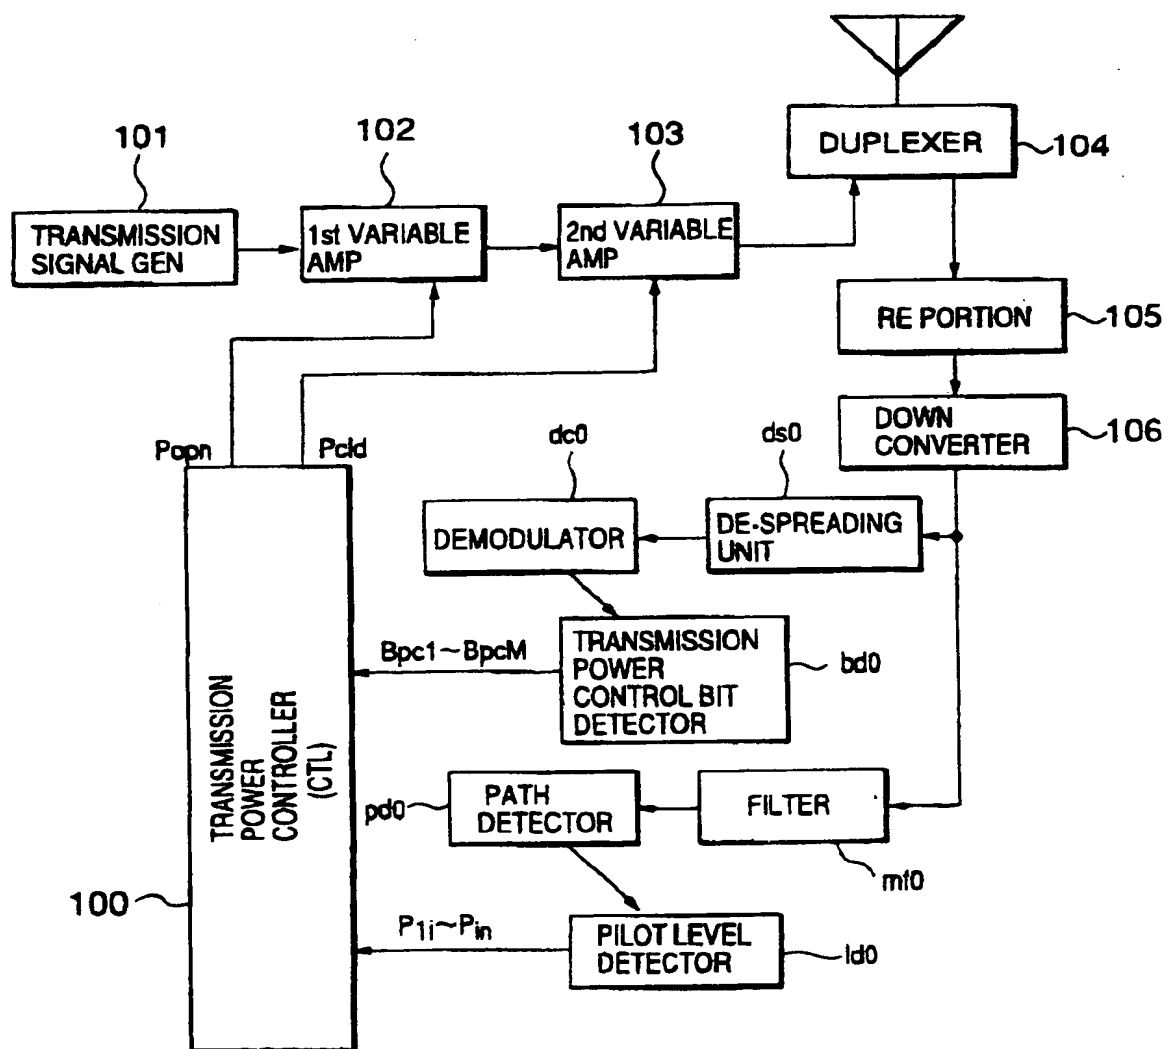


Fig.5

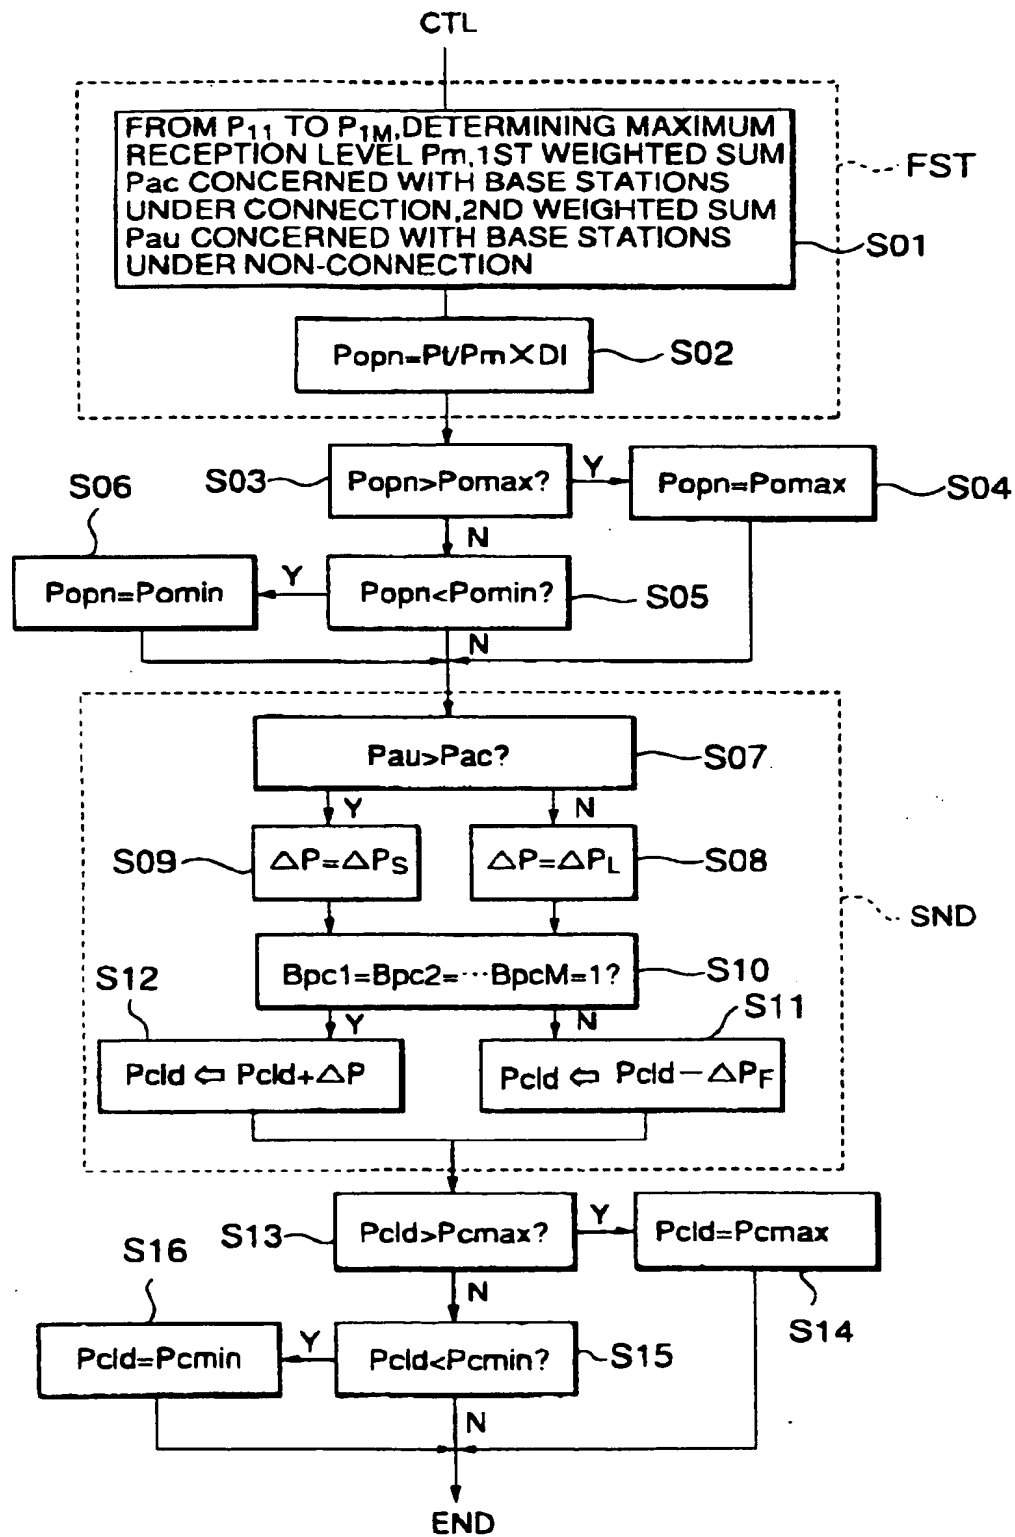


Fig.6

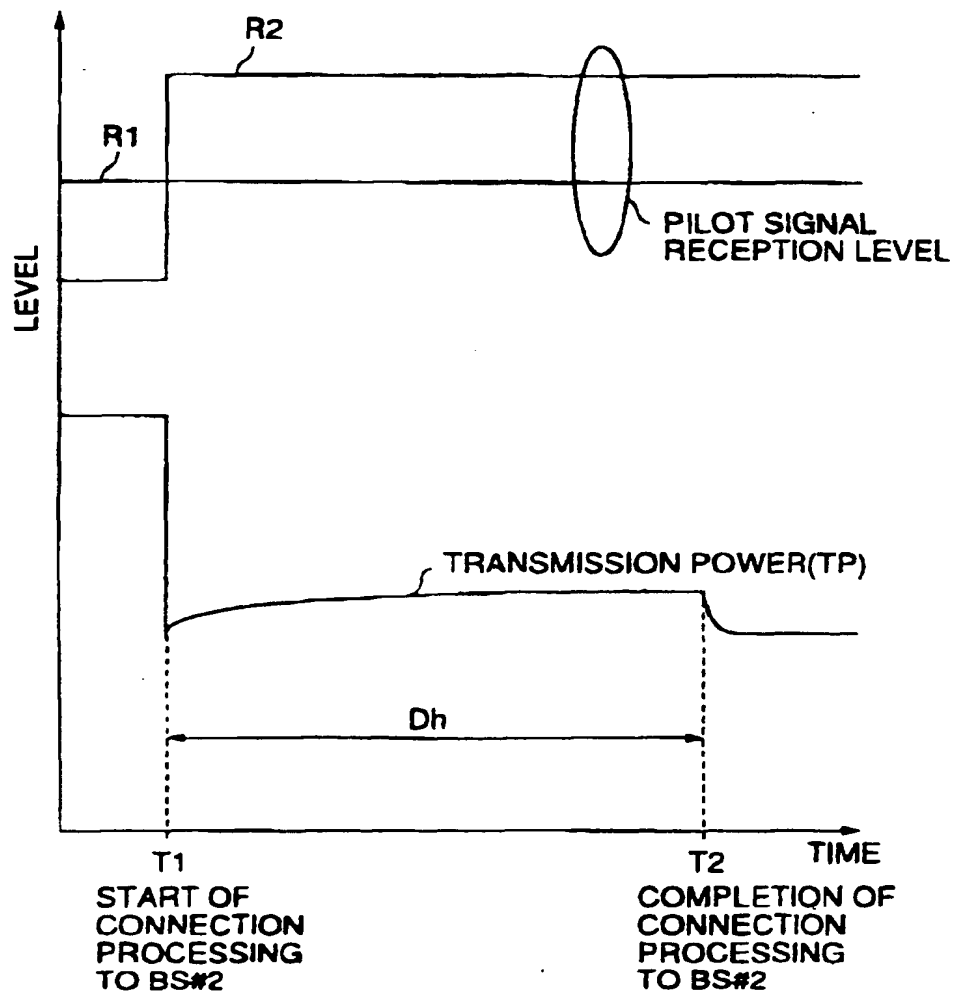


Fig.7

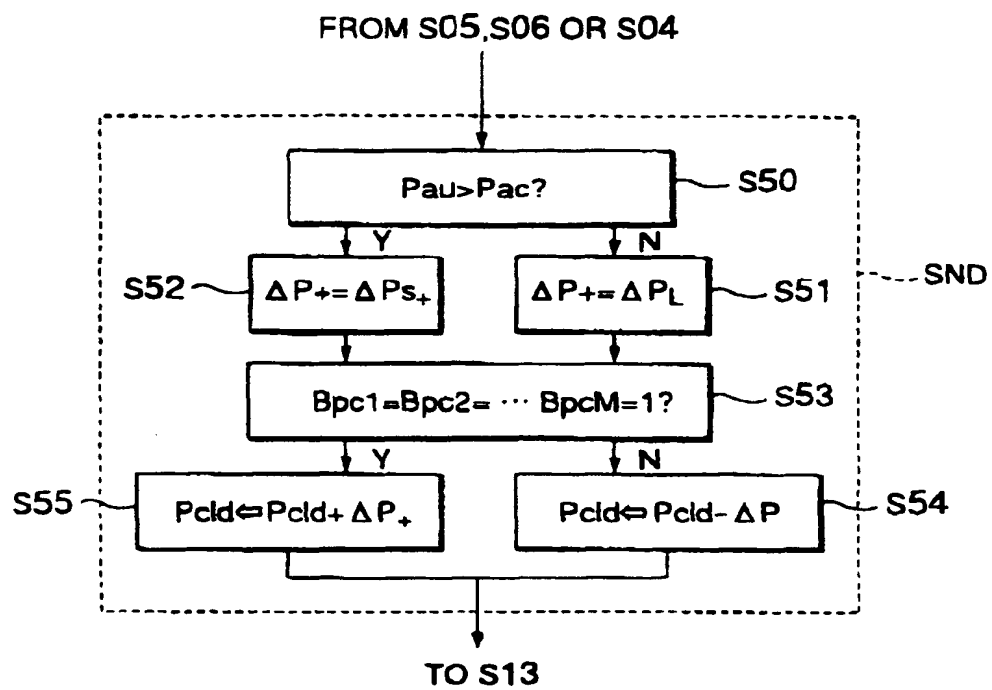


Fig.8

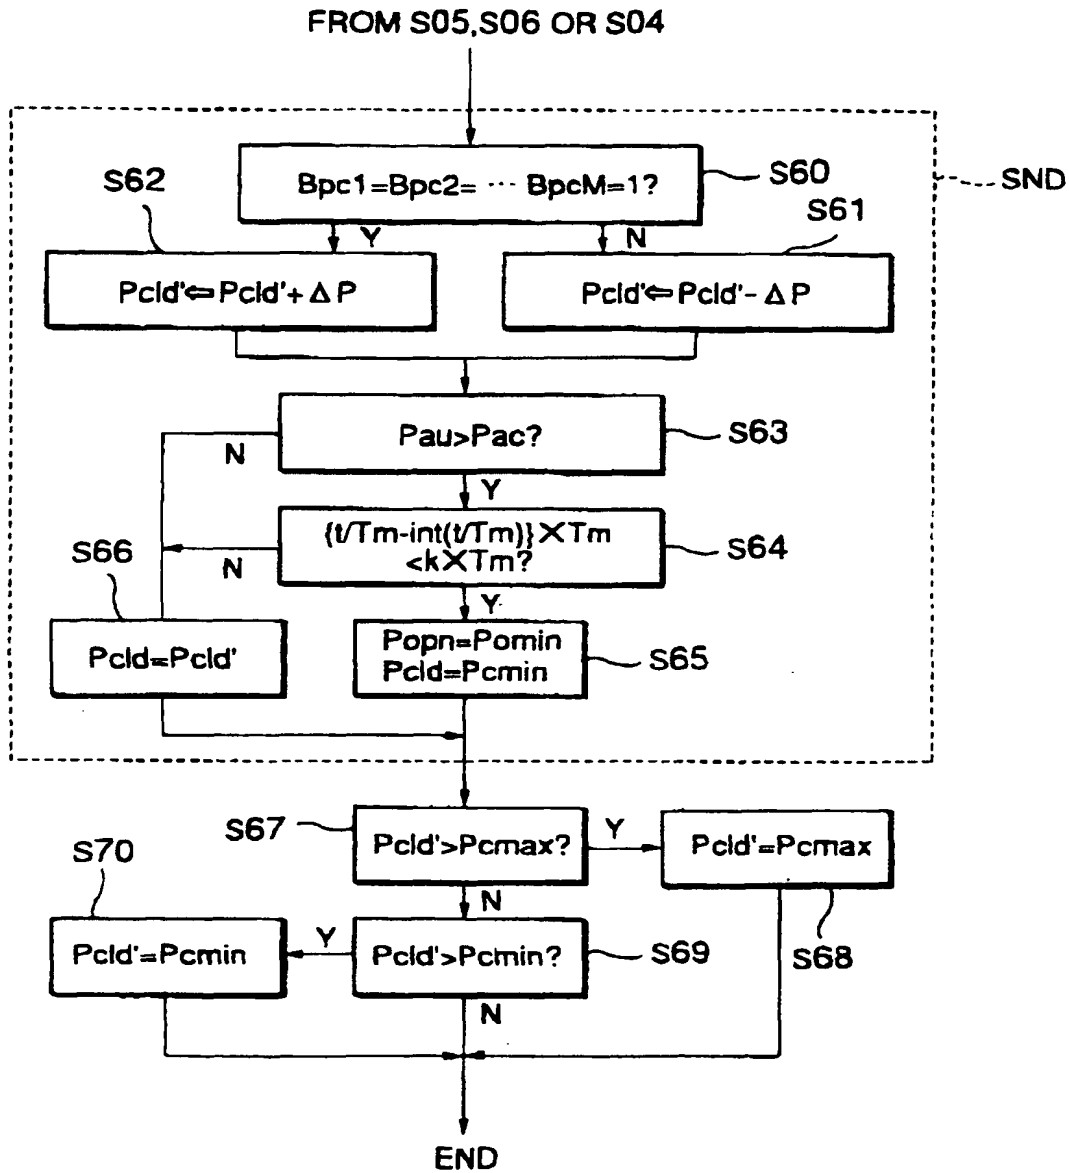


Fig.9

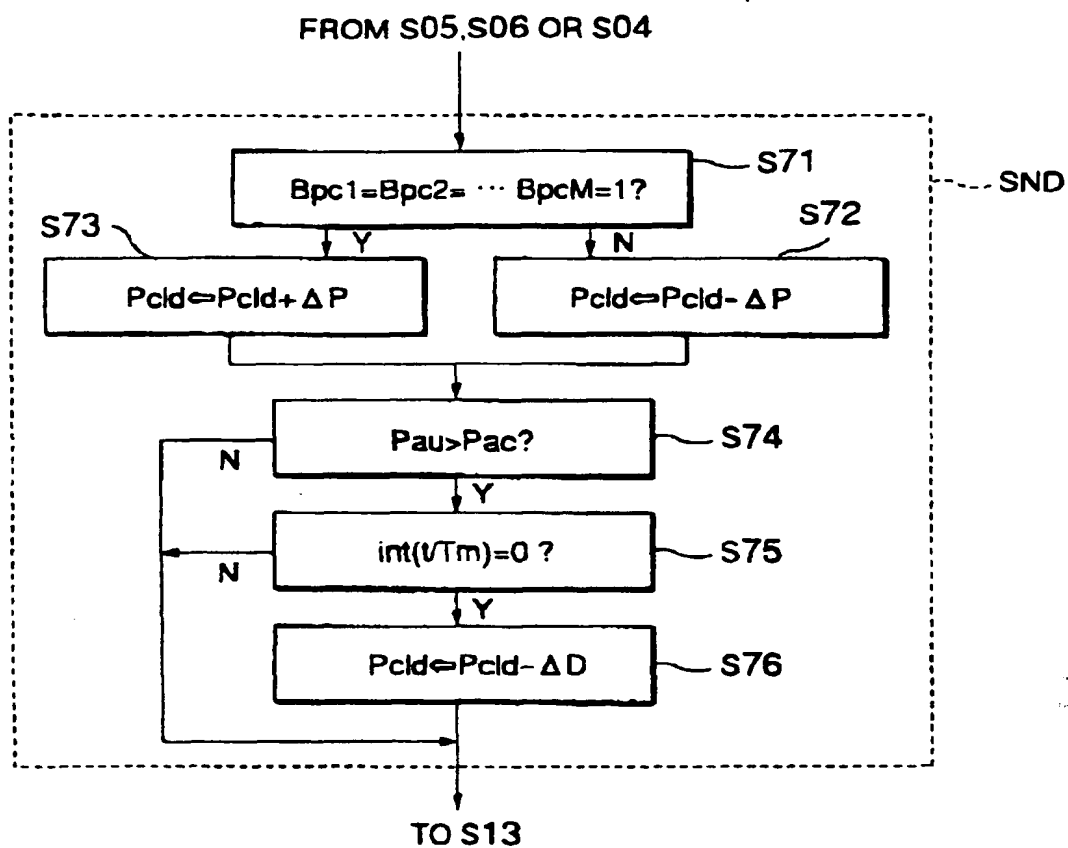


Fig.10


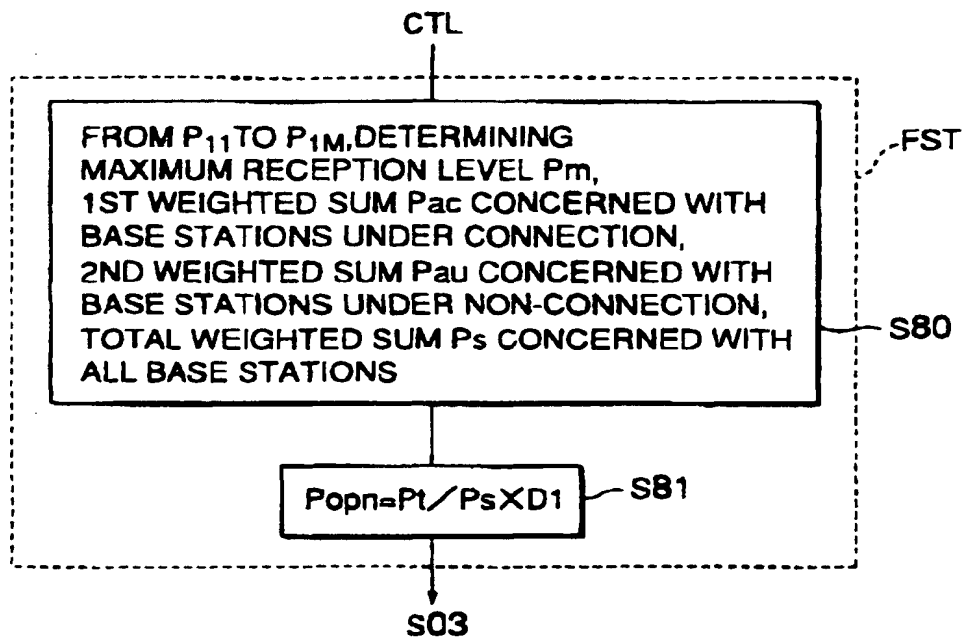


Fig. 11



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 897 225 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
18.07.2001 Bulletin 2001/29

(51) Int Cl.7: **H04B 7/005**

(43) Date of publication A2:
17.02.1999 Bulletin 1999/07

(21) Application number: **98109911.2**

(22) Date of filing: **29.05.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Yoshida, Shousei**
Minato-ku, Tokyo (JP)
• **Ushirokawa, Akihisa**
Minato-ku, Tokyo (JP)
• **Furukawa, Hiroshi**
Minato-ku, Tokyo (JP)

(30) Priority: **12.08.1997 JP 22897697**

(71) Applicant: **NEC CORPORATION**
Tokyo (JP)

(74) Representative: **VOSSIUS & PARTNER**
Siebertstrasse 4
81675 München (DE)

(54) **Mobile station and method for transmission power control and interference reduction in mobile communication systems**

(57) In a method of controlling transmission power in a mobile station which switches a plurality of base stations from one to another with a hand-off time interposed on switching, an increase of the transmission power is suppressed with reference to reception levels of pilot signals sent from the plurality of the base stations which are divided into a first group of base stations under connection and a second group of base stations under non-connection. Specifically, the transmission power is slowly or gradually increased or kept constant when the reception level of the pilot signal sent from the second group base station exceeds that of the pilot signal sent from the first group base station.

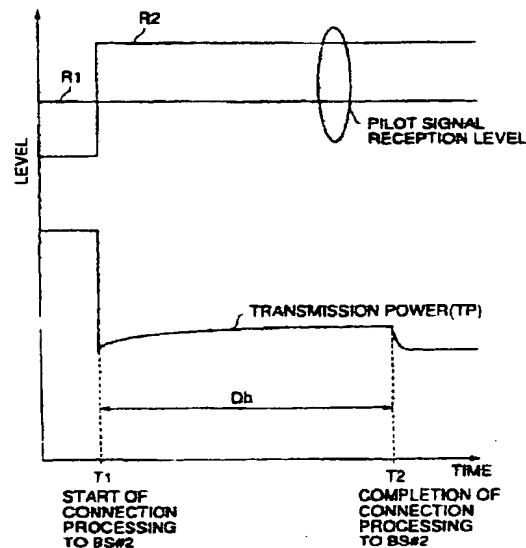


Fig.7



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 9911

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	WO 95 35003 A (NOKIA TELECOMMUNICATIONS OY ;AALTO RISTO (FI)) 21 December 1995 (1995-12-21) * page 3, line 32 - page 5, line 13 * * page 10, line 28 - page 12, line 2 * * figure 3 *	1,2, 5-10,16	H04B7/005
A	EP 0 680 160 A (NIPPON TELEGRAPH & TELEPHONE) 2 November 1995 (1995-11-02) * abstract * * column 2, line 2 - line 20 * * column 5, line 21 - line 35 * * figure 2 *	1,2, 5-10,16	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 May 2001	Examiner López Márquez, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EP0 FORM 1503 (03/02) (PAC01)



European Patent
Office

Application Number

EP 98 10 9911

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 98 10 9911

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1,8,9

Method for controlling transmission power in a mobile station that is communicating with a plurality of base stations. The mobile is periodically detecting the level of each pilot signal sent by the base stations and comparing the reception level from a first group of connected base stations with the reception level from a second group of non-connected base stations. If the second reception level is higher than the first, an increase of the transmission power of the mobile is suppressed.

2. Claim : 2 to 7

Control of the transmission power of a mobile station that is communicating with a plurality of base stations. The mobile receives pilot signals and sets its transmission power in inverse proportion to a maximum of the reception levels. It compares the reception levels from a first group of connected base stations with the ones from a second group of non-connected base stations. If the second reception level is bigger, the power of the mobile is decreased with a large step size. Otherwise it is increased with a small step size.

3. Claim : 10 to 16

Transmission power in a mobile station that is communicating with a plurality of base stations. The mobile is comparing the reception level from a first group of connected base stations with the reception level from a second group of non-connected base stations. The hand-off time is determined with reference to those reception levels. The transmission power is lowered during that hand-off time.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 10 9911

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-05-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9535003 A	21-12-1995	FI 942805 A	14-12-1995
		AU 695283 B	13-08-1998
		AU 2739095 A	05-01-1996
		CN 1150512 A	21-05-1997
		EP 0806120 A	12-11-1997
		JP 10501391 T	03-02-1998
		US 5862489 A	19-01-1999
EP 0680160 A	02-11-1995	JP 2904335 B	14-06-1999
		JP 8018503 A	19-01-1996
		CA 2147922 A	28-10-1995
		CN 1115555 A	24-01-1996
		KR 235855 B	15-12-1999

EPC FORM P0456

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)